




**PACKAGE DIMENSIONS:**

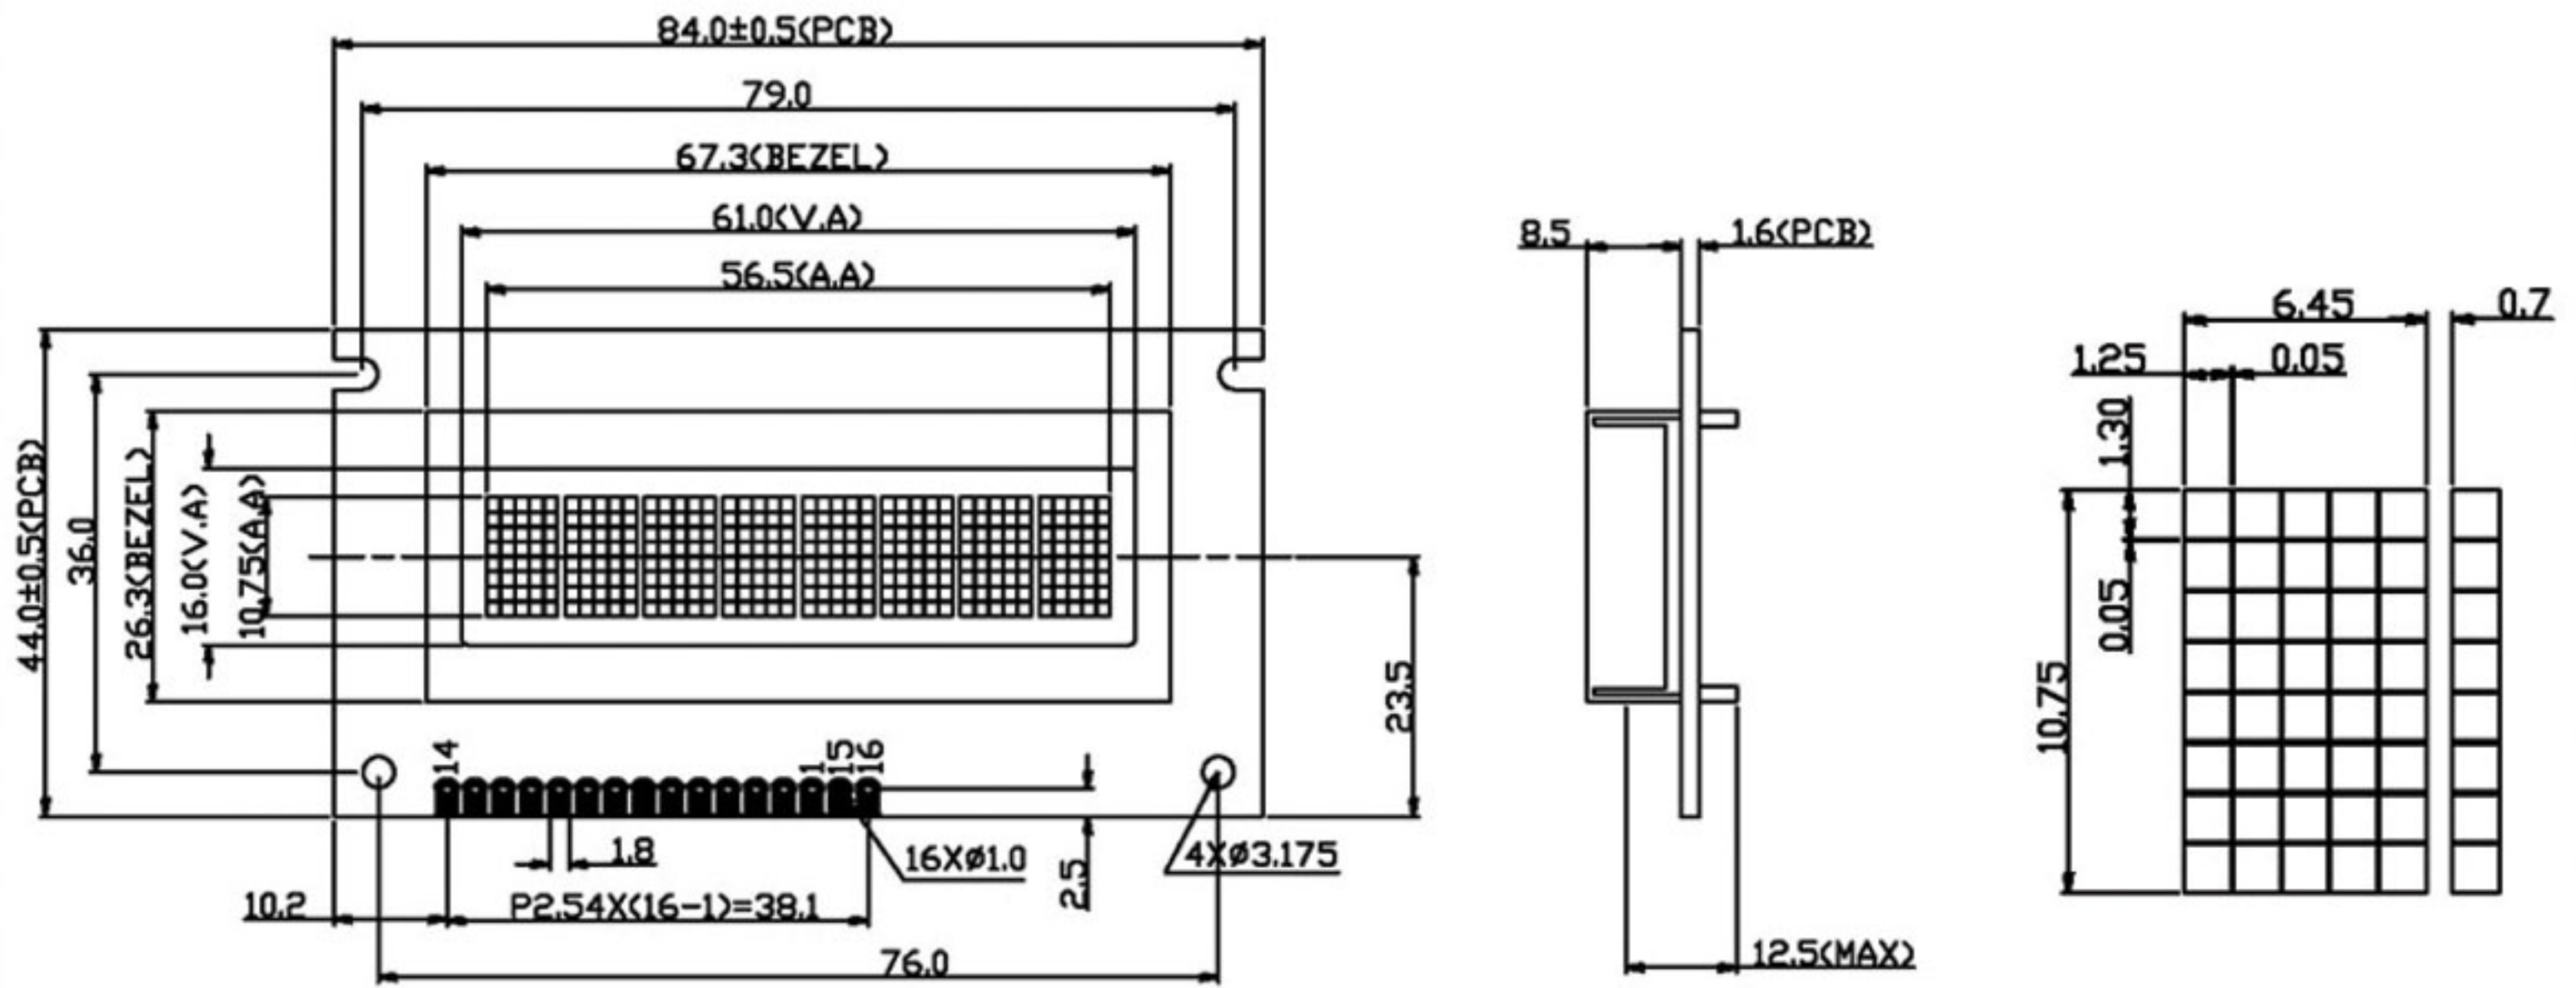

**MECHANICAL SPECIFICATION**

ITEM	SPECIFICATION	UNIT
Module Size	80.0x36.0 x 10.0/13.0	mm
Viewing Area	61.0 x 15.8	mm
Character Font	5 x 7 + Cursor	dots
Character Size	6.45 x 10.75	mm
Character Pitch	7.15	mm
Dot Size	1.25 x 1.30	mm

**ABSOLUTE MAXIMUM RATINGS**

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage	Vdd	-0.3	7.0	V
LCD Supply Voltage	Vlcd(Vdd-V0)	-13.5	0.3	V
Input Voltage	Vin	-0.3	Vdd+0.3	V
Operating Temperature*	Top	0/-20	50/70	° C
Storage Temperature*	Tstr	-10/-30	60/80	° C

\*T1/T2: T1 for standard temperature LCM, T2 for wide temperature LCM

**PIN CONNECTIONS**

PIN	SYMBOL	DESCRIPTION
1	GND	Power Supply : 0V
2	Vdd	Power Supply : +5V
3	V0	Power Supply for LCD
4	RS	Register Select
5	R/W	Read/Write
6	E	Enable
7 to 14	DB0 to DB7	Data Bus
15	A	Anode for backlight
16	K	Cathode for backlight

**ELECTRICAL CHARACTERISTICS (Ta=25° C)**

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage(logic)	Vdd	-	4.5	5.0	5.5	V
Supply Current(logic)	Idd	Vdd=5.0	0.5	1.0	2.0	mA
Driving Voltage(LCD)	Vlcd	-	4.4	5.0	5.4	V
Driving Current(LCD)	Ilcd	-	0.2	0.3	0.4	mA

**BACKLIGHT CHARACTERISTICS (Ta=25° C)**

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	Vf	If=100mA	3.8	4.1	4.3	V
LED Forward Current	If		-	100	150	mA
LED Dissipation	Pd		-	410	-	mW